
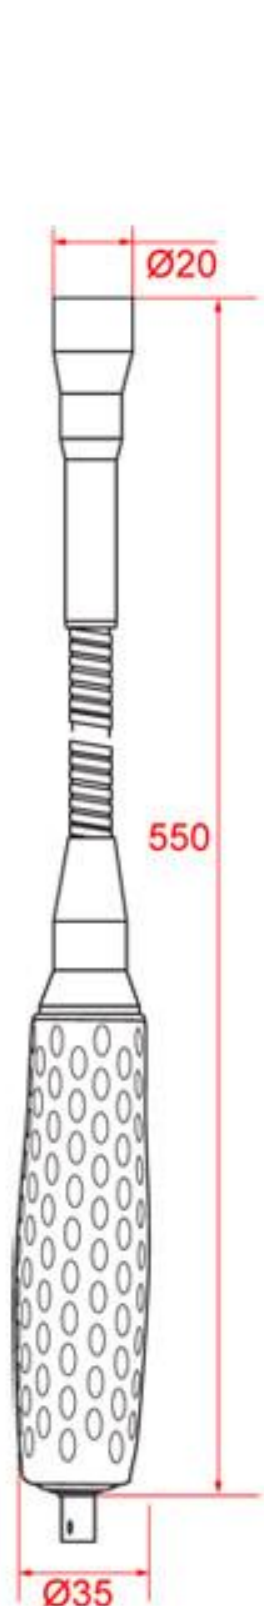


Flexible sensor for SDT270 receiver :


Bandwidth	2 kHz at -6 dB
Central frequency range	40 kHz \pm 1 kHz
Sensitivity	-65 dB min. (at 40.0Khz 0dB = 1 volt/ μ bar)
Length	550 mm / 22 inch (without cable) also available: 820 mm / 32 inch (without cable)
Sensor head ext. diameter	20 mm / 0.79 inch (also available: 14 mm / 0.55 inch)
Cable	coiled 0,5 m to 2 m / 20 inch to 79 inch (connected to sensor with BNC plug)
ATEX certification	available in ATEX certified version  (Directive 94/9/EC) II 1 G / Ex ia II C T3/T2 Ga

Flexible sensor for SDT Sherlog receiver :

Bandwidth	2 kHz at -6 dB
Central frequency range	40 kHz \pm 1 kHz
Sensitivity	-70 dB min. (at 40.0Khz 0dB = 1 volt/ μ bar)
Length	820 mm / 32 inch (without cable)
Sensor head ext. diameter	14 mm / 0.55 inch (also available: 20 mm / 0.79 inch)
Cable	coiled 0,5 m to 2 m / 20 inch to 79 inch (attached to sensor)



Flex 550 mm

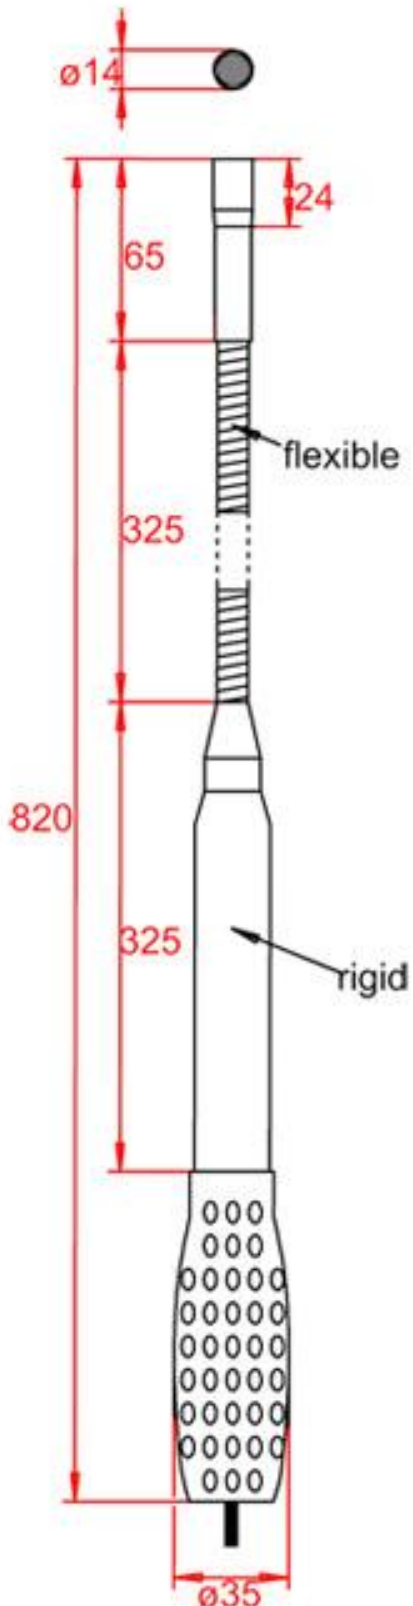

Flex 820 mm